



POWER FORWARD

ARMOR MAX PRO GRADE MSD

GOODYEAR'S VERSATILE, LONG-LASTING TIRE FOR RUGGED MIXED SERVICE APPLICATIONS

Introducing the new Precure Armor Max MSD retread to complement the new Armor Max Pro Grade MSD. These new tires and retreads are hardworking products built for coal field, dump, cement and construction applications. These products build upon the toughness of the Goodyear G177 with enhanced traction, fuel efficiency and retreadability, helping your fleet lower your cost per mile. The new Armor Max Pro Grade MSD is also available with DuraSeal Technology[®] to help reduce downtime by sealing up to ¼" punctures.*

*Seals up to ¼" diameter punctures in the repairable area of the tread. Does not seal sidewall punctures.



GOODYEAR
MORE DRIVEN.



ARMOR MAX PRO GRADE MSD

GOODYEAR'S VERSATILE, LONG-LASTING TIRE FOR RUGGED MIXED SERVICE APPLICATIONS


The Armor Max Pro Grade MSD is available with or without DuraSeal Technology® in the following sizes and load ranges:

DURASEAL SIZES AVAILABLE																									
Tire Size	Load Range	Single Load		Single Inflation		Dual Load		Dual Inflation		Weight		Rim Width		Overall Width		Overall Diameter		Static Radius		RPM	RPK	Tread Depth 32nds	Min. Dual Spacing		Speed Rating
		lbs	kg	psi	kpa	lbs	kg	psi	kpa	lbs	kg	in	mm	in	mm	in	mm	in	mm				in	mm	
TUBELESS TIRES ON 15" DROP CENTER RIMS																									
11R22.5	H	6,610	3,000	120	830	6,005	2,725	120	830	147	67	8.25	11.0	279	42.5	1,080	19.9	505	491	305	32	12.5	318	68	
11R24.5	H	7,160	3,250	120	830	6,610	3,000	120	830	155	70	8.25	11.0	279	44.6	1,133	20.8	528	468	291	32	12.5	318	68	

NON-DURASEAL SIZES AVAILABLE																									
Tire Size	Load Range	Single Load		Single Inflation		Dual Load		Dual Inflation		Weight		Rim Width		Overall Width		Overall Diameter		Static Radius		RPM	RPK	Tread Depth 32nds	Min. Dual Spacing		Speed Rating
		lbs	kg	psi	kpa	lbs	kg	psi	kpa	lbs	kg	in	mm	in	mm	in	mm	in	mm				in	mm	
TUBELESS TIRES ON 15" DROP CENTER RIMS																									
11R22.5	H	6,610	3,000	120	830	6,005	2,725	120	830	141	64	8.25	11.0	279	42.5	1,080	19.9	505	491	305	32	12.5	318	68	
12R22.5	H	7,390	3,350	120	830	6,780	3,075	120	830	154	70	9.00	11.5	292	43.8	1,113	20.5	521	477	296	33	13.5	343	68	
11R24.5	H	7,160	3,250	120	830	6,610	3,000	120	830	149	68	8.25	11.0	279	44.6	1,133	20.8	528	468	291	32	12.5	318	68	


Check goodyeartrucktires.com for updated data.

- **RUGGED TREAD DESIGN** for excellent on- and off-road traction
- **TOUGH, HIGH-TEAR COMPOUND** IN THE TREAD helps resist chips and chunks
- **MIXED SERVICE UNDERTREAD LAYER** for enhanced casing toughness for hardworking applications
- **BUILT-IN SEALANT** helps seal tread punctures* to reduce downtime and repair costs
- **COOL-RUNNING BASE COMPOUND** helps provide long tread life and lower rolling resistance – making it GHG compliant

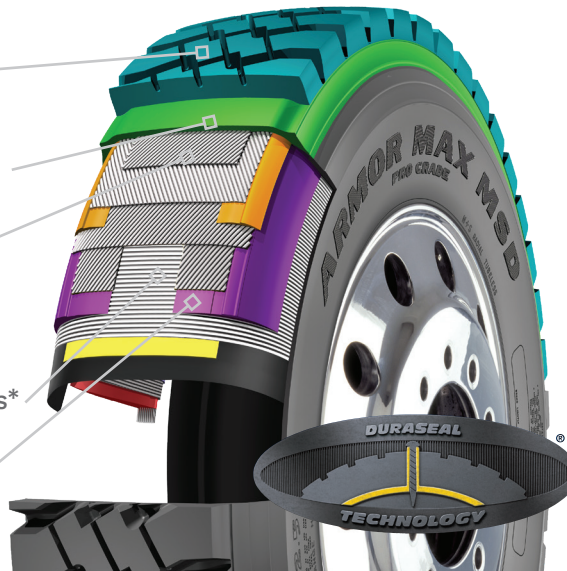

G677 MSD MATCHING RETREADS				
Retreads	Size	Available Width		Tread Depth 32nds
		in	mm	
Pre cure	-	8½, 8¾, 9½, 9¾	215, 225, 240, 250	27

Recommended Applications

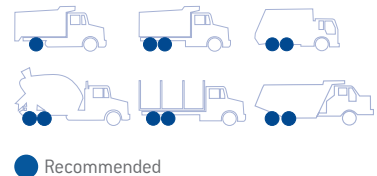

To see how premium Goodyear® tires and retreads like the Armor Max Pro Grade MSD can help your fleet save money, call 1.866.FleetHQ or go to goodyeartrucktires.com.

TOTAL SOLUTION



Trusted Products

Full range of tires, technologies and retreads with options for every fleet.



Premier Service Network

Industry-leading network of 2,300+ North American locations.*



Complete Tire Management

Unparalleled programs and tools to optimize tire assets and ROI.

Find your total solution at goodyeartrucktires.com.

*Fleet research study, Nov. 2015, Lieberman Research Worldwide. 590-fleet sample

*Seals up to ¼" diameter punctures in the repairable area of the tread. Does not seal sidewall punctures.
©2020 The Goodyear Tire & Rubber Company. All rights reserved.
054030 – 05/20

